

Castle Windows

featuring the
Q1667 *Castles & Carriages*
Fabric Collection by
Studio R Designs



FREE
PATTERN
OFFERED
IN INDEPENDENT
QUILT SHOPS TO
COMPLEMENT THIS
FABRIC COLLECTION.



Castle Windows

Please read all instructions carefully before starting. All instructions include a 1/4" seam allowance (except Template C) and strips are cut from selvage to selvage unless otherwise stated. See Template page for Special printing directions.

Quilt Instructions

Approximate size 70" x 85"

1. Cut the following:

	Template A *	Template B	Template C **	3 5/8" sq. □
Fabric C	14	2	5	10
Fabric D	6	2	5	10
Fabric E	14		2	4
Fabric F	16		5	10
Fabric G	16		5	10

*In order to keep grain direction correct, cut 4 3/4" strips, then place **Template A** over strip and cut around template, rotate template every other cut. 14 possible cuts per strip.

****Template C**: draw an 8" circle. Template C does not include outside seam allowance and can be raw edge fused in place. If you prefer to turn under the edge and applique by hand or machine, add 1/4" seam allowance around circle template.

Fabric E - BINDING- cut 8 - 2 1/4" strips, sew end to end and press in half

Fabric I - cut 22 - 8 1/4" squares (center designs evenly)

Fabric J - cut 4 - 11 1/2" strips, subcut 10 - 11 1/2" squares cut 2 - 16 3/4" strips, subcut 4 - 16 3/4" squares, cut squares in half diagonally from both directions for 14 side triangles ☒

cut 2 - 8 5/8" squares, cut in half diagonally for

4 corner triangles ☐

cut 14 - 3 5/8" strips, subcut 132 - 3 5/8" squares. Set 44 squares aside to be paired with C, D, E, F and G. Cut the remaining 88 squares in half diagonally for 176 triangles ☐

cut 5 - 4 3/4" strips, use template A and cut 62 triangles

2. Piecing Order:


1. Draw a diagonal line on the backside of 44 J 3 5/8" squares. Pair each square with C, D, E, F and G squares, right sides together. Stitch 1/4" on both sides of the drawn line. Cut on the line to separate units. Press to the dark fabric.



C - make 20
D - make 20
E - make 8
F - make 20
G - make 20



-1-

Next, make Birds in the Air units by sewing triangles to two sides of all triangle units.

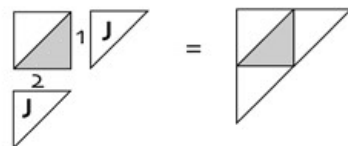


2. Prepare **Template C** circles to be appliqué according to your favorite applique method. If raw edge fusing, place 1/4" double sided fusible web around inside edge on the backside (follow manufacturer directions). If hand or machine applique, turn outside edge under for smooth circle edge, press or baste edge down. Cut circles into quarters by measuring 4". Place one quarter circle over each corner of all Fabric I squares, both right sides up. Match raw edges of corners and secure in place. Stitch (hand or machine) curved edge. Remove excess underneath **Fabric I** 1/4" from seam. Repeating for all 22 blocks.

Template C



C - make 5
D - make 5
E - make 2
F - make 5
G - make 5

3. Sew Birds in the Air units to each side of the above blocks, opposite sides first. Make 22 - 11" finished (11 1/2" unf.) blocks.



4. Sew **template A** pieces together for the borders. Sew 14 J triangles and 13 assorted (C, D, E, F and G) triangles for both TOP and BOTTOM borders. Sew 17 J triangles and 16 assorted triangles for both SIDE borders. First sew pairs together, press, then connect pairs according to the number of triangles needed.

Fabric C, D, E, F or G



Fabric J





make 2 Top and Bottom borders




make 2 Side borders

Make 4 corner units by sewing 2 A's and 1 B template.



5. Sew quilt together by diagonal rows according to the diagram. Next, sew SIDE borders, then **TOP and BOTTOM** borders. Last, sew corner border units, sew one side of **A**, slightly pivot at quilt corner, then sew side of the other **A** to the quilt.

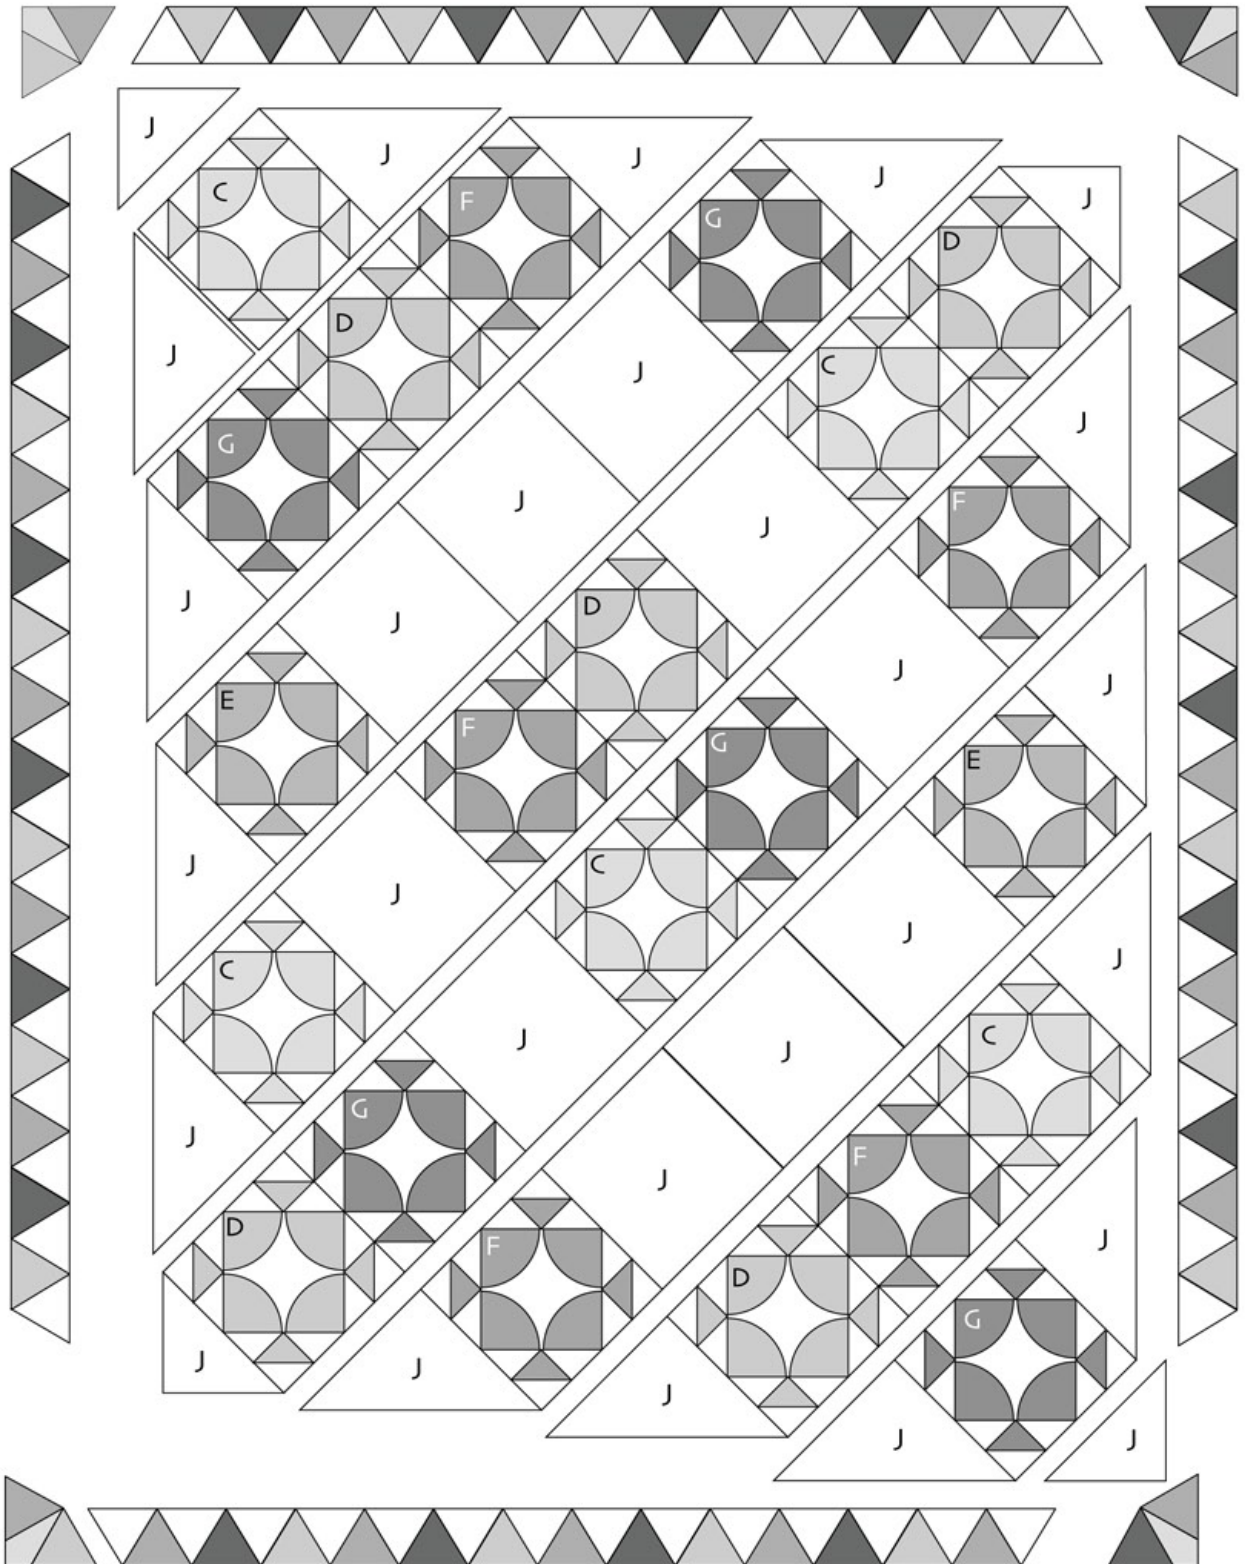

6. The quilt measures approximately 70" x 85". Make backing (**Fabric J**) at least 6" larger than the top. Baste together top, batting and backing. Quilt as desired. Attach binding (**Fabric E**) and enjoy!!

Castle Windows Valance

Approximate size: 60" in width

Please read all instructions carefully before starting. All instructions include a 1/4" seam allowance. The following instructions can be easily modified to make a valance to fit any window size. Fabric H panels can be made larger or increase the number of panels to fit your window.

1. Cut the following:

Fabric A - cut 1 - 17 1/2" x 23 1/2" and 2 - 11 1/2" x 11 1/2"
(center designs evenly)

Fabric C - cut 1 - 6" x 17 1/2"

cut 1 - 12 7/8" square, cut in half diagonally for 1 triangle

Fabric D - cut 2 - 6" x 11 1/2"

cut 1 - 8 7/8" square, cut in half diagonally for 2 triangles

Fabric H - cut identical stripes lengthwise: Cut

2 - 6 1/2" x 20 1/2"

cut 2 - 3 1/2" x 20 1/2"

cut 4 - 1" x 17", 2 - 1" x 9", 2 - 1" x 10", 2 - 1" x 28 1/2",

1 - 1" x 14" and 1 - 1" x 15"

Fabric J - Lining - Cut 1 - 19" x 39"


cut 2 - 13" x 24"

cut 2 - 6 1/2" x 20 1/2"


cut 2 - 3 1/2" x 20 1/2"

2. Piecing Order:

1. First, sew **H** borders on two sides of both **D** triangles, trim ends of **H** even with triangle. Next, sew **D** rectangles above both **A** small panel blocks. Sew **H** borders on both sides, then sew bordered triangle to the bottom according to the diagram. Attach optional tassels to tip of triangle.

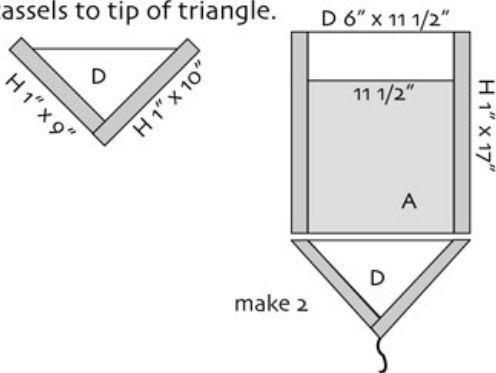


2. Sew **H** borders to two sides of one **C** triangle. Next, sew **C** rectangle above large **A** block. Sew **H** borders to both side, then sew bordered **C** triangle to the bottom.

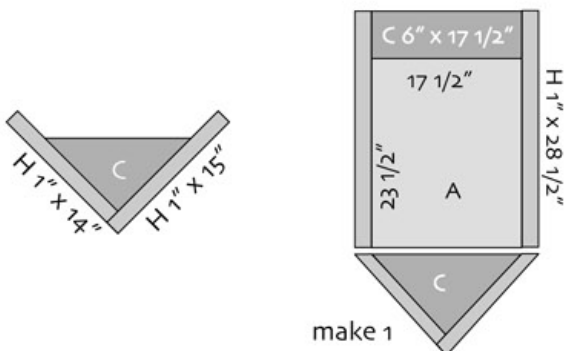


3. Next, place individual pennant on lining, right sides together, pin in place. Stitch the top from corner to corner but leave several inches (at least 5") open for turning. Begin stitching the sides approximately 4" from the top, stitch sides and bottom and stop approximately 4" from the top of the other side. This opening is for the rod so adjust if using a larger or smaller rod. Once sewn, trim lining, clip tips and turn right side out. Press.

Slipstitch top opening closed and stitch side opening seam allowance down but do not close opening for rods. Draw a straight line lightly with chalk from the base of one side opening to the opposite side opening, stitch along line to make casing for rod. Repeat for all pennants.

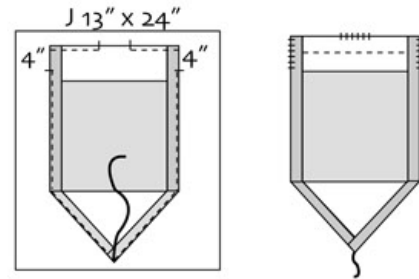

4. To make the center **H** pennants, draw the point outline on the backside of **Fabric H** 6 1/2" x 20 1/2". Make a mark 3 1/2" from the bottom on both sides of **H**. Draw 45° line from both sides and their intersection makes bottom point (can be any degree of angle for a more pointed look). Place **H** over same size lining fabric, right sides together and pin in place. Leave the top open for turning. Stitch the sides and bottom pennant, begin 4" from top edge and end 4" from top of the opposite side for rod opening.

Trim lining, clip tips and turn right side out. Press. Slipstitch side seam allowance down but leave opening for rod and stitch top opening closed. Draw a straight line lightly with chalk from the base of one side opening to the side opening, stitch along line for rod casing. Repeat for 2 center **H** pennants. For side **H** pennants, draw one 45° line 3 1/2" from the bottom edge, repeat for the opposite side by drawing a 45° line on the opposite side of **H** for a reverse pennant.

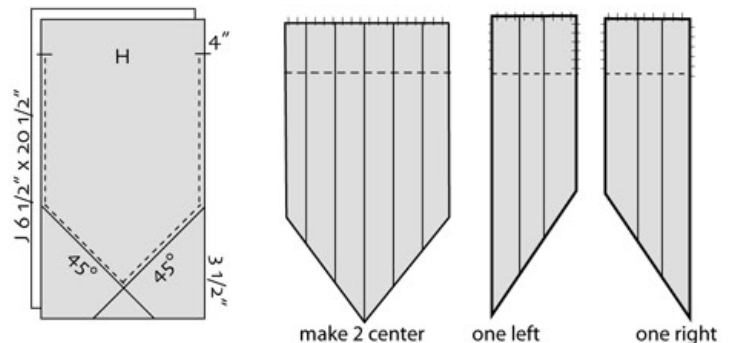

5. Remove the finials from the end of the rod, slide pennants onto rod through casing, replace the finials and enjoy!!

Instructions for one Pillow Sham

Approximate size 30 1/2" x 39 1/2"

1. Cut the following:

Fabric B - cut 1 - 7 1/2" x 25" (center evenly)

Fabric C - cut 6 Template A's and 1 Template B

Fabric D - cut 3 A's and 1 B

cut 2 - 4 3/4" x 25"

Fabric E - cut 7 A's

cut 2 - 4" x 16" (SIDES) and 2 - 4" x 32" (TOP and BOTTOM)

Fabric F - cut 7 A's

Fabric G - cut 5 A's and 2 B's


Fabric J - cut 24 A's

BACKING - cut 2 - 20" x 40"



Optional lining if quilted - white - cut 1 - 33" x 42"
(slightly larger than sham top)

2. Piecing Order:


1. Sew **D** 4 3/4" strips above and below **Fabric B**. Next, sew **E** borders, **SIDES** first, then **TOP** and **BOTTOM** borders.

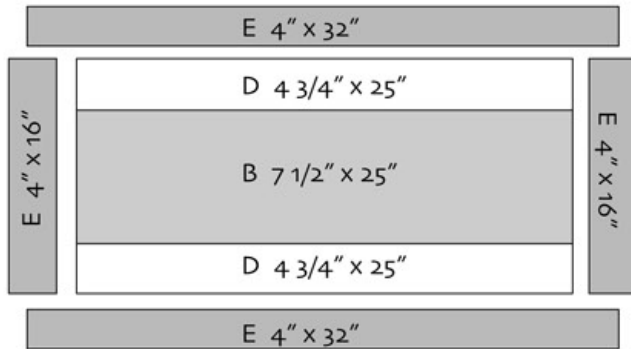

2. Borders: Sew template **A** pieces together for the borders. Sew 5 **J**'s and 4 assorted colors (**C**, **D**, **E**, **F** and **G**) for each **SIDE** border. Sew 7 **J**'s and 6 assorted colors for the **TOP** and **BOTTOM** borders. Make 4 border corner units with 2 **A**'s and one **B** in assorted colors each.


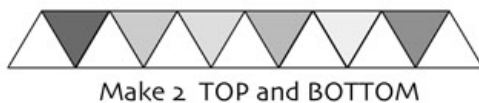



3. Sew borders around center of Sham, **SIDES** first, then **TOP** and **BOTTOM** borders. Last sew corner units, sew side of **A**, slightly pivot at corner, then sew side of the other **A** to the Sham.

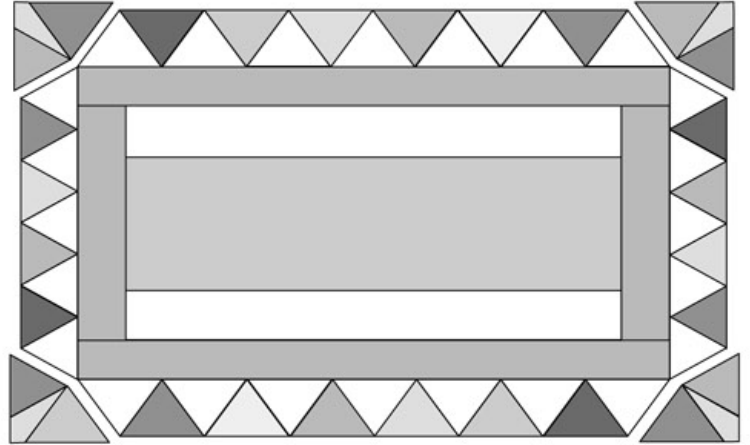


4. Quilting the Sham is optional but will give the flange extra thickness. Layer and baste Sham top, batting and white lining. Quilt as desired.

5. Back of Sham: Double fold 1/4" along one long side of both **Fabric J** 20" x 40" pieces. Topstitch fold. Place backing pieces over pillow sham, right sides together, match corners. Stitch 1/4" around edges of sham. Clip corners and turn right sides out. Stitch in the ditch around the inside of triangle border to create flange. Insert pillow and enjoy!!

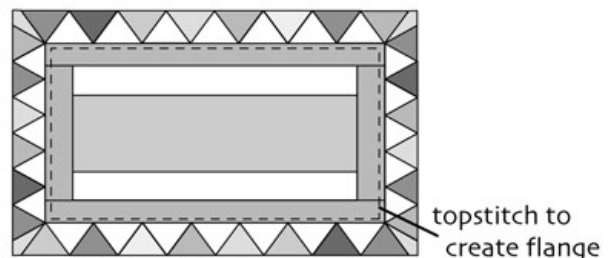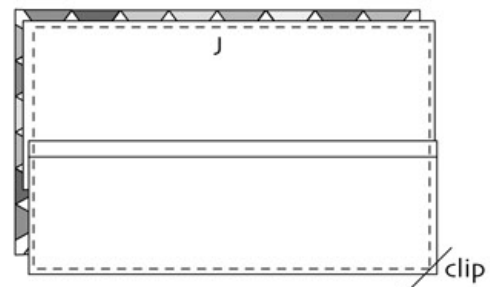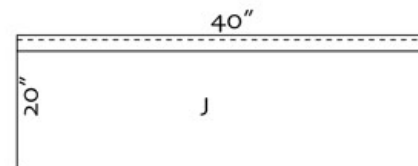

Castle Windows Templates

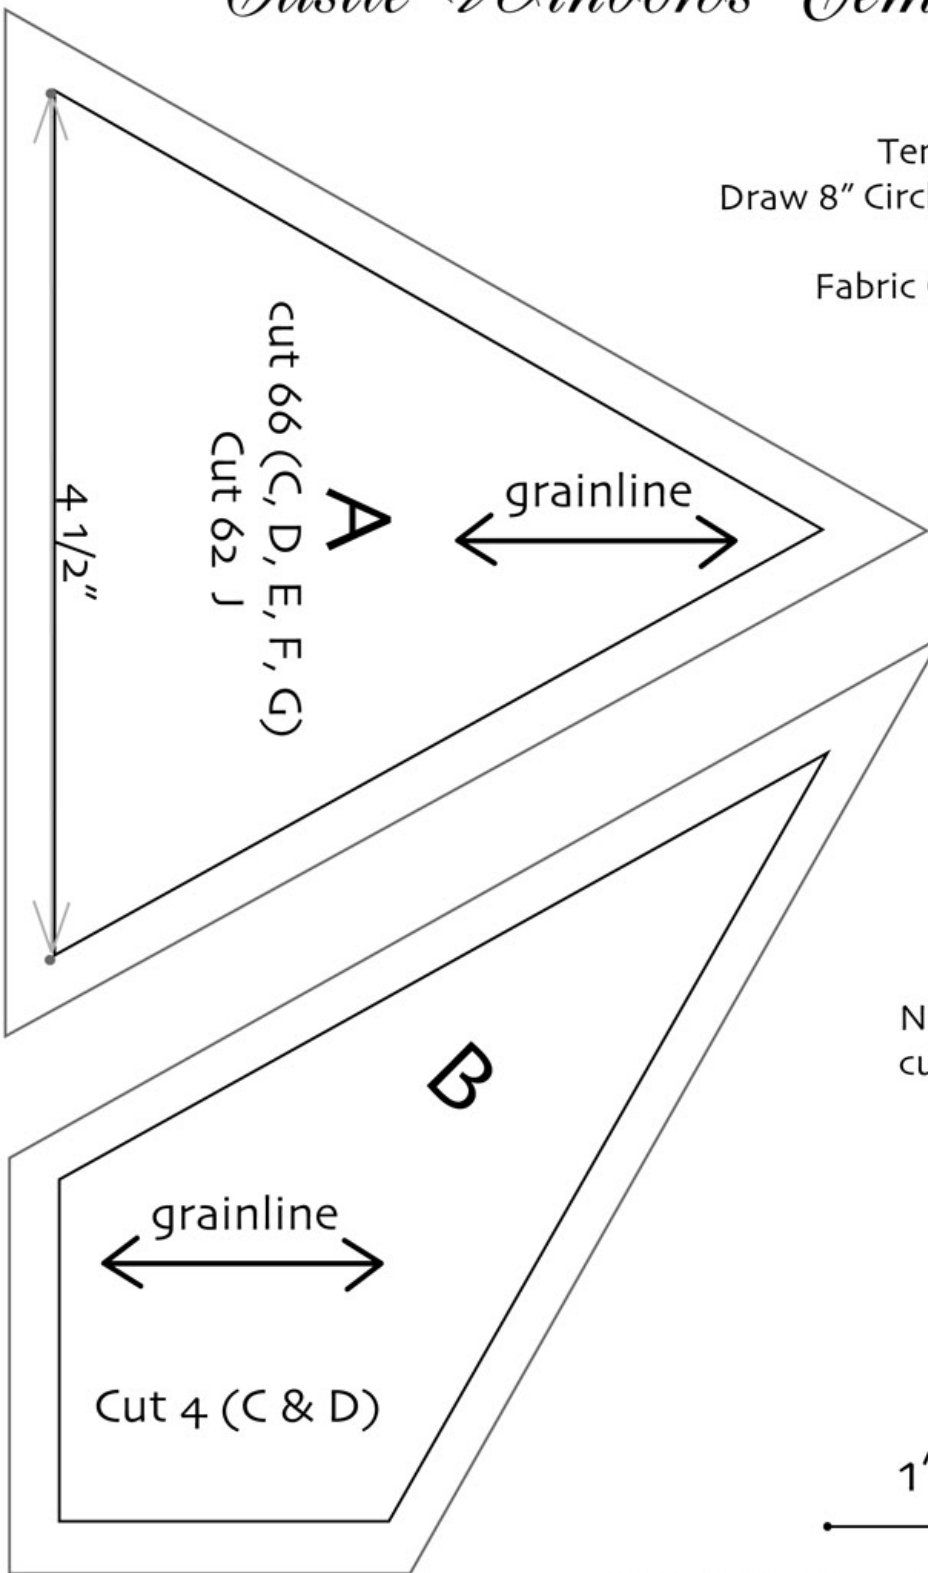

Template C **
Draw 8" Circle (See page 1, step 1)
Cut 22
Fabric C, D, E, F and G

Number of pieces to
cut are for Quilt Only

1"



Printer Test to Measure Template Accuracy:

Print out this page. Measure the line (dot-to-dot) with a ruler - it should be EXACTLY 1" for the templates to be the correct size. You can enlarge or reduce the size of the templates & guide on a photocopy machine.

Castle Windows

featuring the Q1667 *Castles & Carriages*
fabric collection by *Studio R Designs*



Approximate Quilt
Size: 70" x 85.5"

Q - Quilt
V - Valance
S - Sham



68021-735

Fabric A

V - 1 Panel (2/3 yard)



68022-753

Fabric B

S - 3/4 yard



68024-333

Fabric C

Q - 1 1/8 yards

V - 1/2 yard

S - 1/4 yard



68024-555

Fabric D

Q - 1 yard

V - 1/2 yard

S - 1/2 yard



68026-772

Fabric E

Q - 1 1/8 yards (includes binding)

S - 1/2 yard



68027-222

Fabric F

Q - 1 yard

S - 1/4 yard



68027-444

Fabric G

Q - 1 1/8 yards

S - 1/4 yard



68028-757

Fabric H

V - 1 yard



68029-317

Fabric I

Q - 2 yards



NEW Complements Pattern

Q1875-31072-111

Fabric J

Q - 5 yards (piecing)

5 1/2 yards (backing)

V - 2 yards (backing only)

S - 1 1/2 yards (includes backing)

